


# DIRECT

## Heating – quick and simple



Convactor series CORONA

- 1 Epoxy resin coated cabinet
- 2 Laminated air-outlet grille
- 3 Control switch
- 4 Adjusting potentiometer for the required room temperature (\* - 9  $\Delta$  5 - 35°C)
- 5 Electronic circuit board room thermostat
- 6 Power-Triac (for noiseless switching)
- 7 High-temperature safety cut-out
- 8 Connecting cable
- 9 Room temperature sensor (concealed in heater rear panel)
- 10 Specially formed "RX-Silence" aluminium-winged heating elements

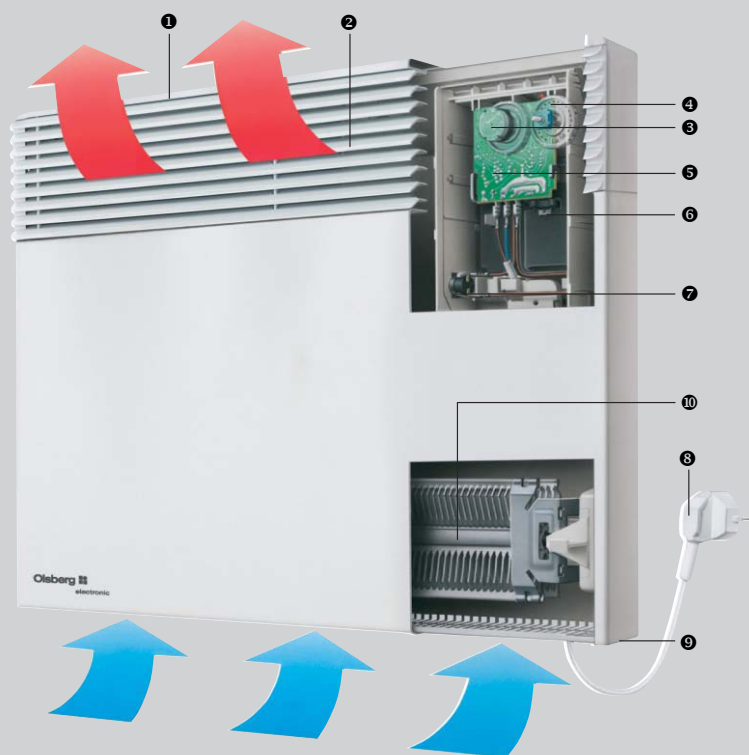

### Convactor series CORONA

Olsberg electric direct heaters are the ideal heat donors for many applications. Their advantages are shown especially in the transition periods spring and autumn and also as a supplement to any other heating system. Olsberg direct heaters are especially beneficial in places where continuous heating is not necessary, for instance in utility rooms, guest toilets, cellars, bathrooms and also in bedrooms.

The CORONA Series is suitable for both living rooms and bathrooms alike as

all the heaters are splash-water proof and safety insulated.

CORONA convectors provide a natural convection in the room. Cool room air is guided in to the heater from below, heated by special aluminium winged heating elements and distributed evenly back to the room by the laminated air-outlet grille.

Direct warmth - you can take that literally: The heat output is totally noiseless and, by means of the three-fold heat exchange area of the special aluminium winged heating elements,

4 to 5 times quicker than using conventional heating elements. The new digital thermostat guarantees that the required temperature is held to exactly 0.1 °C. For 2500 W model, a night-time set-back switch allows the temperature to be automatically reduced by 4 °C at night. The wall-mounting brackets provide a simple fixing of the ready to use heaters.

The attractive, compact heater series comes in five ratings from 500 to 2500 W.

### Olsberg Convactor Series CORONA

Type	15/192-6	15/194-6	15/196-6	15/198-6	15/199-3
Rating (W)	500	1000	1500	2000	2500
Voltage (V)	230	230	230	230	230
Thermostat (°C)	5-35	5-35	5-35	5-35	5-35
Dimensions (H x W x D)	440 x 340 x 80	440 x 420 x 80	440 x 580 x 80	440 x 740 x 80	440 x 900 x 80
Weight (kg)	3,4	4,2	5,3	6,5	7,8
Colour	white	white	white	white	white

#### ENERSAVE Products Limited

New Zealand: PO Box 8867, CHRISTCHURCH Free Phone/Fax: 0800 508 509 Email: info@enersave.co.nz Website: www.enersave.co.nz  
Australia: Unit 107/45 Gilby Road, Mount Waverley, Victoria 3149 Phone: 61 3 9558 8211 Fax: 61 3 9558 8222 ARBN 093 247 413